


NX-216 - 16 zone expander module for NX-8
NX-216E - 16 zone expander module for NX-8E

auxiliary modules

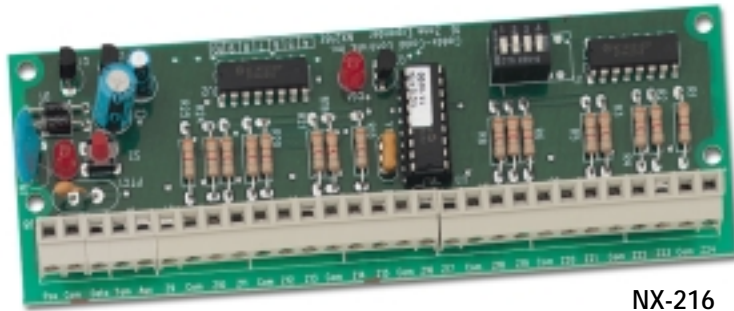

NX-216

- expansion by 8 or 16 zones (max. 5 modules)

- remotely locatable: can be installed up to 800 m from the control panel

- box tamper input


- equipped with a power isolator

The NX-216 is a microprocessor-controlled 16-zone expander for the NX-8 control panel. Up to five NX-216 expanders can be added to the NetworX control panel with a maximum zone count of 48 zones. The NX-216 can be slid into the control panel enclosure or can be installed remotely.

Technical specifications:

| | |
|--------------------------------------|------------------------|
| Operating power (nominal) | 12 Vdc via NetworX bus |
| Current consumption (typical) | 34 mA |
| Auxiliary power output | 12 Vdc/ 100 mA |
| Tamper input | NC contact |
| Operating temperature | 0° to 50 °C |
| Dimensions PC board | 153 x 54 mm |
| Weight PC board | 0.066 kg |

| ordering code | part number | product description |
|---------------|-------------|----------------------------------|
| | NX-216 | 16 zone expander module for NX-8 |

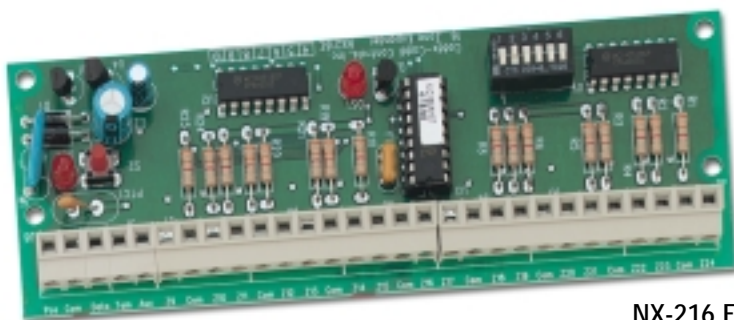

NX-216 E

- expansion by 8 or 16 zones (max. 23 modules)

- remotely locatable: can be installed up to 800 m from the control panel

- box tamper input

- equipped with a power isolator

The NX-216E is a microprocessor-controlled 16-zone expander for the NX-8E control panel.

Up to twenty-three NX-216E expanders can be added to the NX-8E control panel with a maximum zone count of 192 zones.

The NX-216E can be slid into the control panel enclosure or can be installed remotely.

Technical specifications:

| | |
|--------------------------------------|------------------------|
| Operating power (nominal) | 12 Vdc via NetworX bus |
| Current consumption (typical) | 34 mA |
| Auxiliary power output | 12 Vdc/ 100 mA |
| Tamper input | NC contact |
| Operating temperature | 0° to 50 °C |
| Dimensions PC board | 153 x 54 mm |
| Weight PC board | 0.066 kg |

| ordering code | part number | product description |
|---------------|-------------|-----------------------------------|
| | NX-216E | 16 zone expander module for NX-8E |

